





AS-ARE

Features

- Used to control time sequence
- With front / back connecting socket
- LED display




Off delay, without auxiliary voltage AS-ARE



Type

Time relay AS-ARE

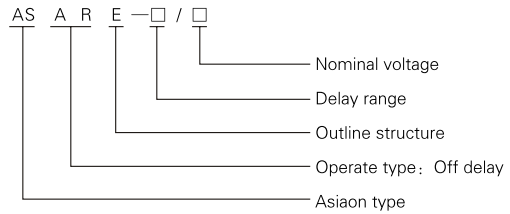


Specification


Nominal voltage	24VAC/DC; 220-240VAC
Delay type	On delay
Output type	1C/O contact, 2LED display
Contact capacity	250VAC5A; 28VDC5A
Life	Mech: 10 ⁷ ; Elec: 10 ³
Delay range	0.1S-10S; 0.3-30S
Delay difference	≤5%
Operating temperature	-10°C ~ +50°C
Dielectric strength	BCC1500VAV; BOC1000VAC

Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

AS-ARE Outline dimension

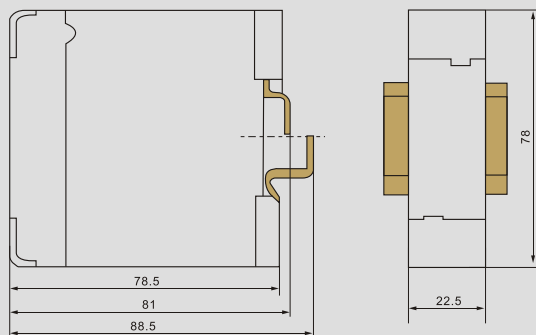

AS-ARE Wiring diagram

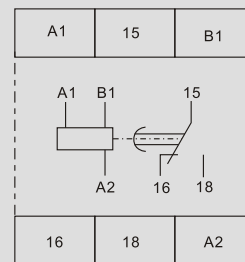

A1-A2 Voltage supply: 220-240VAC or 110-130VAC
 A1-B1 Voltage supply: 24VAC/DC
 15-16/18 c/o Contact