




AS-DP1

Features

Used to control time sequence
 With front / back connecting socket
 LED display

Type

Time relay AS-DP1

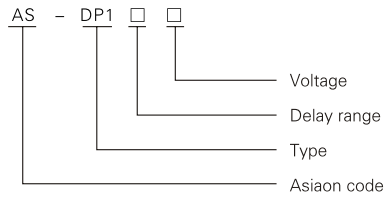


Specification

Voltage	24、36、110、230、400VAC; 12、24、48VDC
Delay type	On delay
Delay range	0.5S ~ 30S;
Delay accuracy	± 1%;
Reset time	300mS
Operating temperature	-10℃ ~ +50℃
Power consumption	≤3VA
Dielectric strength	BCC1500VAC; BOC1000VAC
Output type	Relay output: 1Z
Contact capacity	5A220VAC
Standard	GB 140485;JB/T 10047

Outline dimension、Wiring diagram、Mounting holes

AS-DP1 Outline dimension

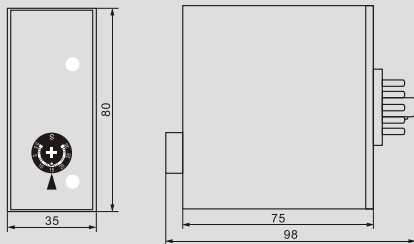

AS-DP1 Wiring diagram

