



AS-DP2

Features


- Used to control time sequence
- With front / back connecting socket
- LED display

Specification

Voltage	24、36、110、230、400VAC; 12、24、48VDC
Delay type	On delay
Delay range	0.5S ~ 30S;
Delay accuracy	± 1%;
Reset time	300mS
Operating temperature	-10°C ~ +50°C
Power consumption	≤3VA
Dielectric strength	BCC1500VAC; BOC1000VAC
Output type	Relay output: 2Z
Contact capacity	5A220VAC
Standard	GB 140485; JB/T 10047


Type

Time relay AS-DP2

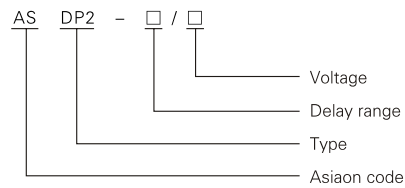

Outline dimension、Wiring diagram、Mounting holes

AS-DP2 Outline dimension

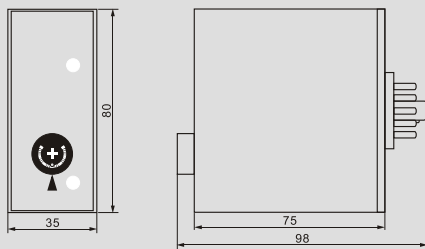

AS-DP2 Wiring diagram

