




ASMR

Features

- Used to control time sequence
- With front / back connecting socket
- LED display

Type

Multi-function multi-range time relay AS-MR

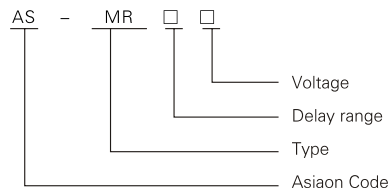


Specification

Voltage	12, 24, 48, 110, 230, 400, 525VAC; 12, 24, 48VDC
Delay type	On delay; Interval delay, Equal repeating delay, Interval pulse start, Pulse start delay
Delay range	0.02S ~ 1S; 0.15S ~ 10S; 1S ~ 1M; 10S ~ 10M; 1M ~ 1H;
Delay accuracy	10M ~ 10H; 22M ~ 24H; 3H45M ~ 240H;
Reset time	300mS
Operating temperature	-10°C ~ +50°C
Power consumption	≤3VA
Dielectric strength	BCC1500VAC; BOC1000VAC
Output type	Relay output: 2Z
Contact capacity	5A220VAC
Standard	GB 140485;JB/T 10047

Outline dimension、Wiring diagram、Mounting holes

ASMR Outline dimension

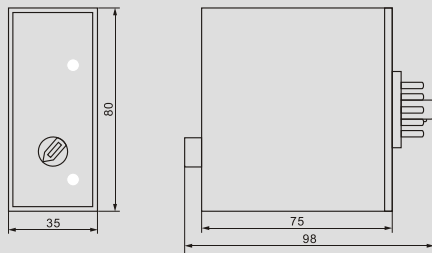

ASMR Wiring diagram

