



AS14S

Features


Used to control time sequence
 With front / back connecting socket
 LED display

Specification

Voltage	DC12V~48V, AC12V~380V50Hz/60Hz
Power expend	DC1.0W, AC1.0VA
Control output	5A220VAC
Insulation Resistance	DC500V, 100MΩ
Dielectric strength	BCC1500VAC, BOC1000VAC
Operating temperature	-10°C ~ 50°C
Humidity	35% ~ 85%
Life	Mech:10 ⁷ , Elec:10 ³
Weight	≈100g

Type

Time relay AS14S

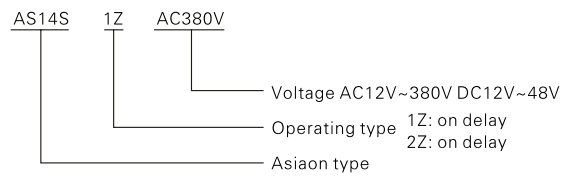


Time range

0.01S ~ 99.99S
1S ~ 99M99S
1M ~ 99H99M

Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

AS14S Outline dimension

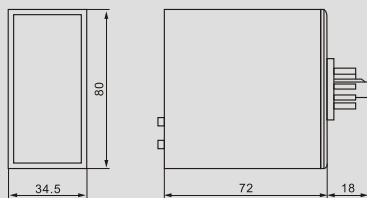

AS14S Wiring diagram

