



JQX-62 1Z 80A

JQX-62F 1Z 80A

JQX-62FH 1Z 120A

JQX-62F 1Z 120A

触点参数

触点形式	1Z、1H、1D
接触电阻	≤100mΩ (1A 6VDC)
触点材料	AgCdO AgSnO <sub>2</sub>
触点负载 (阻性)	80A 250VAC /30VDC 120A 250VAC /30VDC

性能参数

绝缘电阻	≥1000MΩ (500VDC)
介质电压	线圈与触点间 ≥2500VAC 1min 断开触点间 ≥1200VAC 1min
吸合/释放时间	≤40ms/25ms
引出端方式	螺丝安装

DC 线圈规格表


额定电压 VDC	吸合电压 VDC	释放电压 VDC	线圈电阻 Ω ± 10%
6	4.8	0.6	18
12	9.6	1.2	70
24	19.2	2.4	290
48	38.4	4.8	1150
60	48	6	1800
110	88	11	6050

线圈参数

额定线圈功率	80A:DC2.0W/AC4VA 120A:DC2.0W
--------	---------------------------------

AC 线圈规格表

额定电压 VAC	吸合电压 VAC	释放电压 VAC	线圈电阻 Ω ± 10%
6	4.8	1.8	9
12	9.6	3.6	36
24	19.2	7.2	144
48	38.4	14.4	576
110	88	36	3025
220/240	176	72	12000/14400




螺杆式

导轨型




外形尺寸、安装孔尺寸 (底视图)、接线图 (底视)

JQX-62F 1Z: 外形尺寸(螺杆式安装) 安装孔尺寸(底视图)

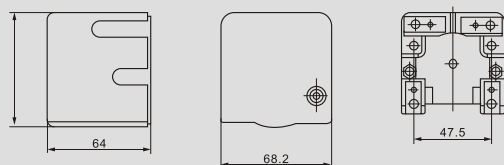

JQX-62FH 1Z: 外形尺寸(导轨型)

安装孔尺寸(底视图)

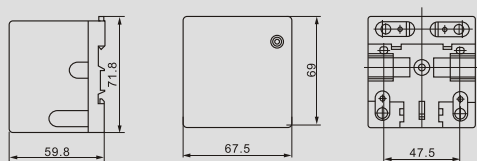

接线图 (底视)

